

MAPEFOAM

Closed cell polyethylene foam cord as a support to elastomeric sealants, for correct sizing of joints



WHERE TO USE


Mapefoam can be used for vertical and horizontal joints in interiors and exteriors.

Mapefoam is designed for correct sizing of joints in industrial ceramic tile and natural stone flooring prior to filling with elastomeric sealants.

Mapefoam can also be used for sizing joints between prefab panels, between standing finish and bearing structures, etc.

Some application examples

- Floor joints.

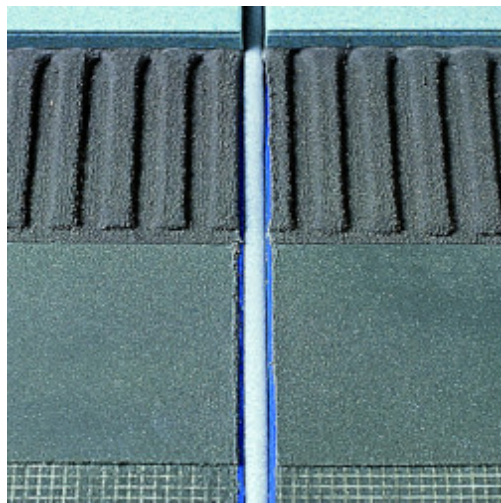

- Fitting **Mapefoam** in a joint of a terrace (Hotel Parador - Cesenatico - Italy).



TECHNICAL CHARACTERISTICS

Mapefoam is made of closed cell polyethylene foam. It does not absorb water and its characteristics remain unchanged over time.

Mapefoam's flexibility makes it an excellent support for the sealant and its anti-adhesive surface allows the sealant to flow easily.

RECOMMENDATIONS

Always use **Mapefoam** cord whose diameter is larger than the width of the joint to be sealed.
For example, for joints 12 to 13 mm wide, use **Mapefoam** 15 mm in diameter.

APPLICATION PROCEDURE

Before inserting the **Mapefoam** cord, make sure the inside of the joint is thoroughly clean and free of loose particles, using a vacuum-cleaner with the proper sized attachment.

Mapefoam of the appropriate sized diameter should be inserted into the joint, exerting slight pressure. Best results are obtained using **Mapefoam** cord whose diameter is larger than the width of the joint to be sealed.

The joint should then be sealed with an appropriate sealant from the MAPEI line of sealants.

N.B. The width and depth of the joints should be determined by the movement anticipated, the modulus of elasticity of the sealant, and the particular installation.

PACKAGING

Mapefoam is available in the following diameters and packaging:

- 6 mm: boxes 2500 m
- 10 mm: boxes 550 m
- 15 mm: boxes 550 m
- 20 mm: boxes 350 m
- 25 mm: boxes 200 m
- 30 mm: boxes 160 m

For further and complete information about the safe use of our product please refer to the latest version of our Material Safety Data Sheet.

PRODUCT FOR PROFESSIONAL USE.

TECHNICAL DATA (typical values)	
PRODUCT IDENTITY	
Colour:	grey
Density (kg/m ³):	40

Hazard classification according to EEC 88/379:	none
Resistance to longitudinal tensile stress (N/mm ²):	40
Resistance to transversal tensile stress (N/mm ²):	31
Longitudinal elongation (%):	15
Elasticity (%):	10
Resistance to solvents:	good
Resistance to deformation:	excellent
Dimensional stability:	excellent
Temperature when in use:	from -40°C to +80°C
Water absorption:	nil

WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the Technical Data Sheet, available from our website www.mapei.com

407-12-2008-gb

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

